

## Type 1008A Stainless Steel Metric Case Commercial Gauge

Commonly used on:

- *Hydraulic systems*
- *Machine tools*
- *Pressure washers/sprayers*
- *A variety of other applications*

Ashcroft® Type 1008A gauges are synonymous with durability, flexibility and exceptional quality.

### **Durability**

The Type 1008A case and ring assembly is constructed of durable, corrosion-resistant stainless steel. The gauge enclosure is sealed to provide maximum protection in adverse environmental conditions. The core of the Type 1008A is the patented PowerFlex™ movement. This movement provides a higher level of resistance to shock, vibration and pulsation than conventional gauge movements.

### **Flexibility**

Both 63mm and 100mm Type 1008A gauges are available dry, field fillable, glycerin filled or silicone filled. Weld nuts are standard on all back connection gauges, therefore,

any back-connection gauge with the addition of a U-clamp accessory kit, can be panel mounted. For limited space constraints, the front-flange mounting kit is offered. Where it is necessary to convert a larger panel opening to a smaller size, the retrofit flange kit is available. Custom dials and metric sockets are also available.

### **Exceptional Quality**

True Zero™ indication, a unique safety feature standard on these gauges, is the accurate indication of zero pressure being applied to the gauge. In addition to the increased safety benefits, this means reduced inspection and manufacturing costs for you and your customer.

Ashcroft Type 1008A gauges are manufactured in an ISO 9001 certified facility.



**Specifications**

- Size:** 63mm (2½"), 100mm (4")
- Case:** 304 stainless steel, dry (1008A) or liquid filled (1008AL)
- Fill Fluid:** Glycerin (20° to 150°F ambient)
- Ring:** 304 stainless steel, crimped
- Window:** Polycarbonate
- Dial:** Black figures on white background, aluminum
- Pointer:** Black, aluminum
- Bourdon Tube:**
  - C-shaped Bronze (vac.-600 psi and compound)
  - Helical Bronze (1000 psi-6000 psi)
  - Helical stainless steel (10,000 psi-15,000 psi)
- Movement:** Patented PowerFlex™ movement
- Socket:** Brass, with O-ring case seal
- Restrictor:** Brass throttle plug, 0.013" orifice (except for vacuum 15 psi ranges)
- Connection:** ¼ NPT lower and back

- Ranges:** Vac. thru 15,000 psi and compound. Equivalent metric ranges available
- Accuracy:** ASME B40.1, Grade B, 3-2-3%
- OPTIONAL FEATURES:**
  - Case:** Sealed case, field fillable (LJ)  
Silicone filled (GV)
  - Mounting Hardware:** U-clamp (UC)  
Front flange (FF),  
Retrofit flange (RF)
  - Socket:** Throttle Plugs, 0.007", 0.020", 0.063"  
JIS, DIN and other connections on application

- Others:** Customized dials  
Nonstandard ranges  
Special calibration on application  
FlutterGuard™ (eliminates rapid pointer flutter on most vibration/ pulsation applications – dry gauges only)




A Halliburton Company


106 Harrison Road  
Berea, KY 40403  
Tel: (606) 986-9333  
Fax: 1-800-28 BERA  
(1-800-282-3732)

www.dresser.com/instruments

**HOW TO ORDER** (Typical example)

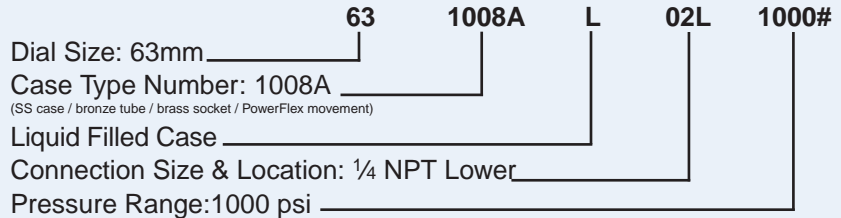

**Dimensions**

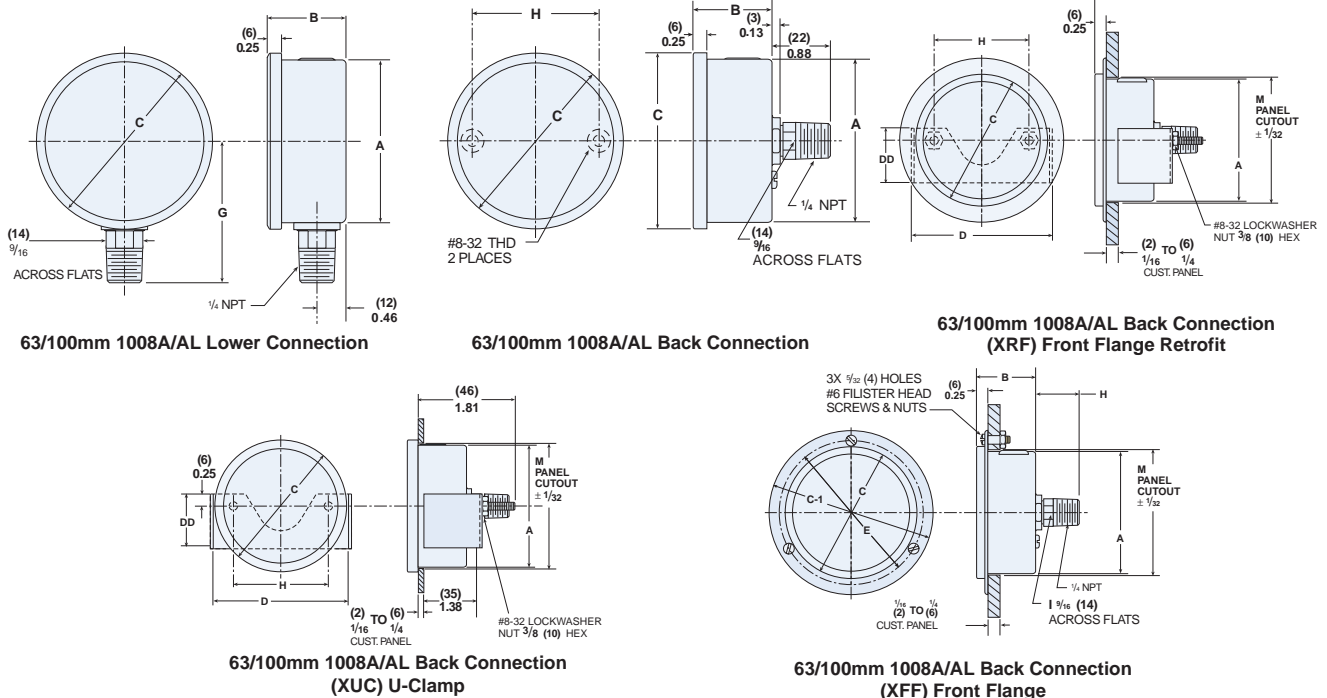

Dimensions in (mm) inches	SIZE/TYPE	A	B	C	CC	D	DD	E	G	H	M	Weight	
												Dry	Wet
63mm, 1008A/AL		(63)	(31)	(69)	(86)	(75)	(28)	(75)	(56)	(49)	(65)	.11kg	.21kg
		2.48	1.21	2.71	3.36	2.95	1.12	2.95	2.20	1.94	2.54	.25lb	.47lb
100mm, 1008A/AL		(100)	(31)	(106)	(133)	(107)	(28)	(116)	(74)	(76)	(101)	.18kg	.42kg
		3.94	1.24	4.16	5.22	4.20	1.12	4.57	2.92	3.00	3.97	.40lb	.94lb